

SIGNAL

Technical datasheet

Exit signs


Ref. SG-K



EN 60598-1, 60598-2-22
230V 50/60HZ

Exit signs: SIGNAL. Reference: SG-K, manufactured by Normalux. Lumens 85 lm. Autonomy (h) 1h. Operating mode: Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Ni-Cd 3,6V/750mAh. IP: 20. IK: 04. Version: Standard. Color: White. Casing: Polycarbonate. Voltage: 230V 50/60Hz. Manufactured according EN 60598-1, 60598-2-22 regulations.

Dimensions (mm):

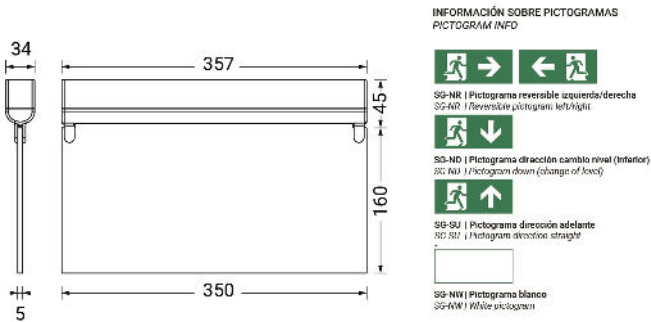

Lumens	85 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	1h
Battery	Ni-Cd 3,6V/750mAh
Power (W)	2,5W
Operating mode	Maintained
Class	II
IP	20
IK	04
Operating temperature (°C)	5 to 35
Maximum viewing distance	24m
Remote control	No

* According to EN 1838 regulations

Photometric data:

